



FUNCTIONS	COLOUR PIN		
	L	R	
A1 Stop/Tail lamp	2/1	2/6	6/7
A2 Flash(indicators) lamp L/R	7	3	1/4
A3 Reversing lamp	12	12	2
A4 Fog lamp	4	4	11
B No. plate lamp (B1-L.H.,B2-R.H.)	1	6	7
E End-Outline Marker Lamp	1	6	7
F Front Marker lamps (F1-L.H.,F2-R.H.)	1	6	7
M Stop lamp	2	2	6
N Mass-earth cables	5	5	3
U 12-pin flat plug			

- 1 - 07-YELLOW
- 2 - 12-PINK
- 3 - 05-WHITE
- 4 - 03-GREEN
- 5 -
- 6 - 02-RED
- 7 - 01-BLACK/06-BROWN
- 8 - 9-GREY
- 9 - 13-ORANGE
- 10 - 27,28-WHITE/BLACK/RED
- 11 - 4-BLUE
- 12 -

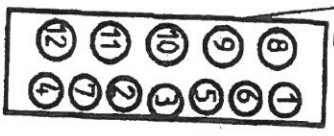


No.	COLOUR
01	black
02	red
03	green
04	blue
05	white
06	brown
07	yellow
08	purple
09	grey
12	rose
13	orange
19	BLUE-white
21	WHITE-blue
23	GREEN-red
24	PURPLE-white
25	ORANGE-black
26	GREEN-blue
27	WHITE-black
28	WHITE-red

Date: _____		By: _____	
Checked: _____		Material: _____	
Drawing No: 2350		Scale: _____	
Revision: _____		Project: _____	
Author: _____		Date: _____	
		3000-35527-02	

Wiring diagram 12V

Motors/Generators

WIRING DIAGRAM FOR MOTOR VEHICLE 12 PIN PLUG

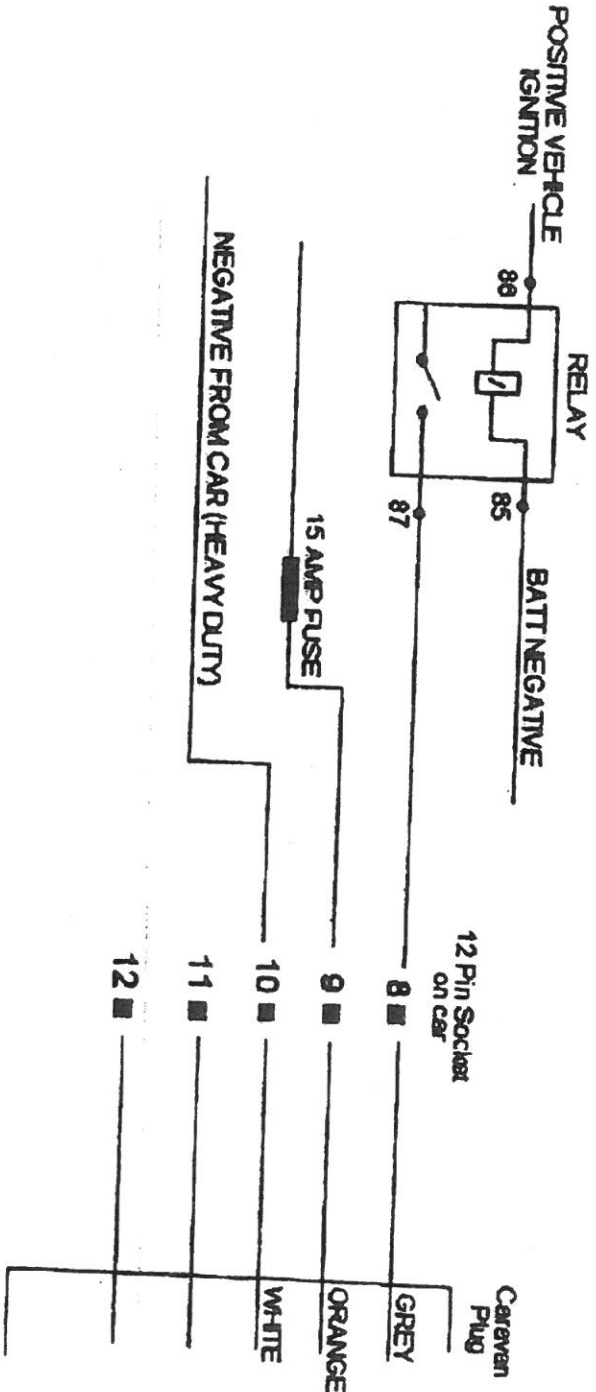

- 8 ■ RUNS FRIDGE
- 9 ■ CHARGES BATTERY IN CONJUNCTION WITH (9) AND WHEN RUN BY ITSELF WORKS 12V INTERIOR LIGHTS
- 10 ■ EARTH
- 11 ■ SPARE
- 12 ■ SPARE

Dear Sir,
 Wiring Diagram for 12 pin
 Plug on Avelia Caravans
 Legends
 Avelia Australasia
 EURO RV